

# Be Sure to Read - Safety Precautions



## General Safety & Handling

- ViGi Vehicle Video Recorders can basically be installed in most cars. Follow the installation guide provided to make sure the device is installed securely.
- Do not leave your Vehicle Video Recorder under direct sunlight unattended for a prolonged period of time or extreme heat, though operating temperature is -20°C to +80°C. Keep the device away from excessive shock, dirt or humidity at all times.
- Do not use the MT-DR9 in areas with strong magnetic or electric field.
- Do not spray water directly onto the product as it may induce electric shock and damage the product
- Do not gaze at or operate the device while driving. It is dangerous and may lead to an accident.
- Clean the camera lens with clean soft cloth each time before use and clear unnecessary objects from around the device to avoid blocking the camera lens. Tinted windshields can also affect the quality of recorded images.
- Do not use chemicals or detergents to clean the device as they may be corrosive and damage the product
- To familiarize you with the various functions of Vehicle Video Recorder, read owner's manual provided before using MT-DR9.

## Power Supply

- Please use the USB cable to charge the MT-DR9 by connecting it to an operating PC for over 5 hours, before using it.
- Use only the enclosed power adapter cable (12V DC) together with Vehicle Video Recorder. Connect the Vehicle Video Recorder only to the car cigarette lighter socket in the vehicle. Use of unauthorized power cable or have the cable connected to other power sources may damage the product or cause fire.
- Beware that MT-DR9 could drain off your car battery if it continues to operate during parking for prolonged period of time. Please consult ViGi appointed car workshops to take necessary measures before you allow MT-DR9 to operate overnight for surveillance purpose.

## Recording in SD/ SDHC Card

- Before you insert or remove the SD/SDHC card, first stop the recording and wait for indicator light to turn green (red for recording) to prevent damages to the product and video files. When removing SD/SDHC card, press the card gently for it to pop out. Take it with your fingers.
- Do not pull the SD/SDHC card by force or with sharp tools. Do not insert any object other than the SD/SDHC memory card into the SD/SDHC memory card slot, or the slot could be damaged.
- If you wish to save any video file that is important to you, download it immediately as it would rewrite older files automatically when SD/SDHC Card is full. To save, edit, or erase data on an SD/SDHC memory card, you must unlock the card.
- MT-DR9 records 10 seconds more of video data when power cut off during accident
- Please use a high speed SD/SDHC card – Class 6 or 150X (see owner's manual for recommended types and brands).
- Be sure to format a SD/SDHC memory card on the MT-DR9 before using it.
- It's recommended to format the SD/SDHC card once every half or a month to sustain the best performance.


## Technical Maintenance

- Vehicle Video Recorder MT-DR9 should be repaired by authorized technicians only. Do not disassemble, repair or alter the product. Such actions will void the product warranty and waive the user's rights for after-sales service.

# Installation Guide for MT-DR9




## 1) Accessories Check List

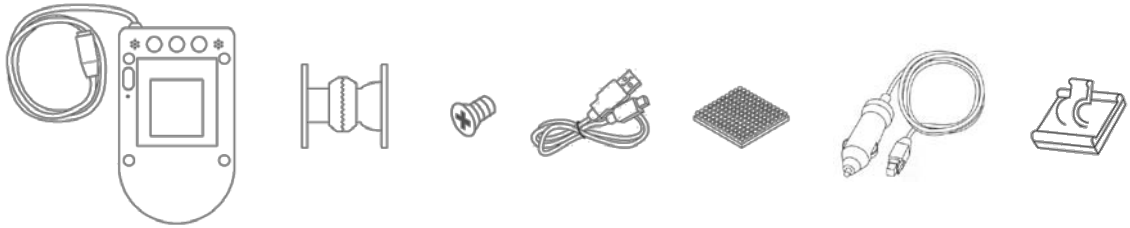


Recorder Unit    360° Mount    Screws    USB Cable    3M Velcro    Power adapter    Cable Mount

## 2) Fixing 360° Mount to Recorder Unit

This design of the base mount can have its position adjusted for any surface with any angle. Before applying adhesive and screws to the base mount, try to have different angles.

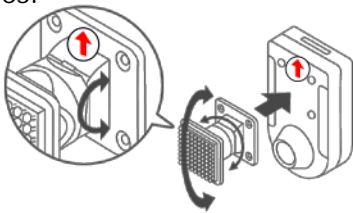


For maximum **vertical** angle adjustments

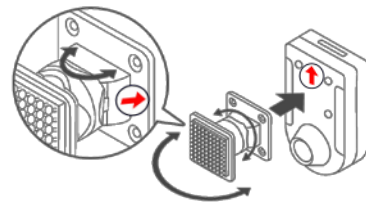


For maximum **horizontal** angle adjustments

## 3) Installation Steps

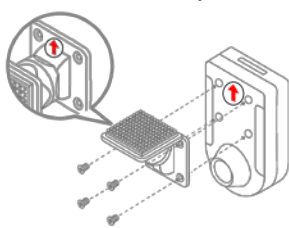

Use 4 screws provided to fix the 360° Mount to Recorder



Insert SD/SDHC card



Connect Recorder to Power Adapter Cable



Plug the Power Adapter Cable into the 12V Car Cigarette Lighter Socket




Select & clean the windscreen area before mounting the Recorder



Tip: Refresh LCD Screen with any buttons

Start the engine to turn on the Recorder. Use the LCD screen to confirm mounting location



Peel off 3M Velcro adhesive tape liner




Fix the adhesive side of the 3M velcro on the selected location. Apply pressure on tape for > 30 seconds. Wait for at least 1 hour before using it.




Mount MT-DR9 on 3M Velcro tape



Remove Cable Mount liners



Fix Cable Mounts to run power adapter cable neatly to the 12V socket

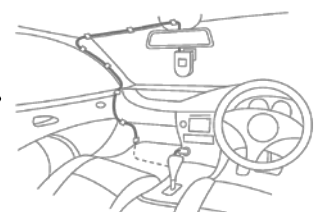

Installation completed and you are ready to go!